

# Closure Strips

## APPLICATIONS


## STANDARD SIZES



### CI-7™ Closures

2.0 lbs/ft<sup>3</sup> density cross-linked polyethylene foam used to close gaps in roof and side wall applications. Material is extremely strong, resilient and water resistant. Available in gray or natural white colors. Also available with optional adhesive strip for ease of installation.

Thickness: 1", 2"  
Lengths: Per customer requirements (up to 48')

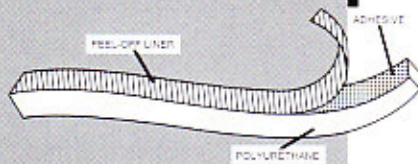

### Polyurethane Foam Strips

Semi closed-cell, flexible material used to close unusual gapping situations. Useful on valley or hip roof applications. Available with or without adhesive backing in charcoal color.

Thickness: 3/4", 1", 1 1/2", 2"  
Width: 1", 1 1/2", 2"  
Lengths: 25'



### CI-7™ Angle Cut Closure

Used for hip roof, valley, or gable trim applications. Material is available in right or left hand angles, & conforms exactly to panel configuration. Raw material has the same specifications as CI-7. Life expectancy is 3-4 times that of polyurethane foam strips.

Thickness: 1 1/2"  
Lengths: Per customer requirements (up to 48')