


CUPOLA MOUNTING BASE - ASSEMBLED KIT INCLUDES:

- (1) ASSEMBLED MOUNTING BASE WITH ATTACHED FLASHING
- (16) #12-14 X 1" SELF-DRILLING CUPOLA ATTCHING SCREWS (PAINTED)

ROOF PANELS AND BASE FLASHINGS NOT SHOWN FOR CLARITY

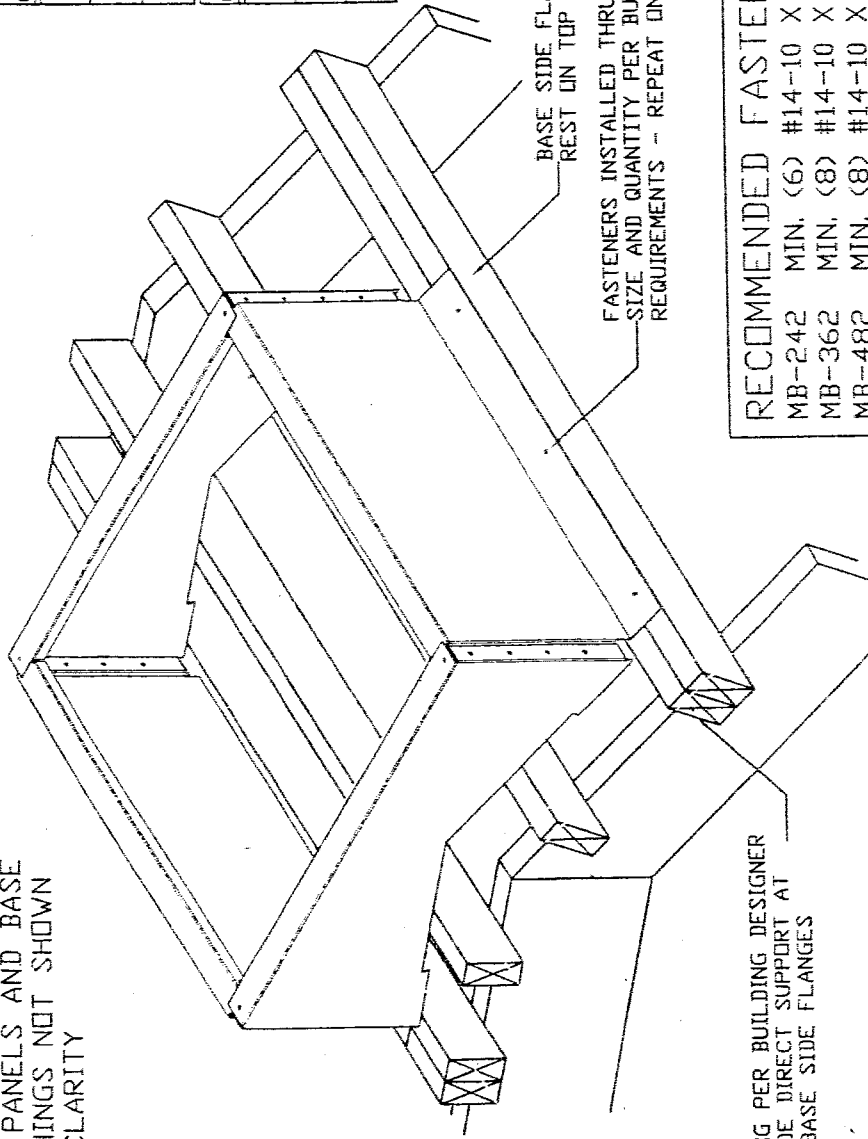

CURB PART #	CURB O.D.	PITCH	HEIGHT
MB-242-3	23 3/4"	3/12	8 3/4"
MB-242-4	23 3/4"	4/12	9 5/8"
MB-242-6	23 3/4"	6/12	11 5/8"
CURB PART #	CURB O.D.	PITCH/12	HEIGHT
MB-362-3	35 3/4"	3/12	10 1/4"
MB-362-4	35 3/4"	4/12	11 5/8"
MB-362-6	35 3/4"	6/12	14 5/8"
CURB PART #	CURB O.D.	PITCH/12	HEIGHT
MB-482-3	47 3/4"	3/12	11 3/4"
MB-482-4	47 3/4"	4/12	13 5/8"
MB-482-6	47 3/4"	6/12	17 5/8"

RECOMMENDED FASTENERS

- MB-242 MIN. (6) #14-10 X 2 1/2" HEX WASHER HEAD - PAINTED
- MB-362 MIN. (8) #14-10 X 2 1/2" HEX WASHER HEAD - PAINTED
- MB-482 MIN. (8) #14-10 X 2 1/2" HEX WASHER HEAD - PAINTED

INSTALLATION INSTRUCTIONS

1. Position the assembled base over the roof sheathing and ridgecap. Fasteners will go thru at the ribs.
2. PRE-DRILL 1/4" HOLES CENTER AT EACH RIB ENSURING THAT THE FASTENER WILL GO INTO THE FRAMING 1 1/4".
3. Anchor curb thru roof steel, then directly to building framing using fasteners per design drawings.
4. Assembled base curb includes painted self-drilling screws to attach cupola.
4. Install cupola per instructions provided using #12-14x1" self-drillers.

CUPOLA BASE INSTRUCTIONS

rev 05/08