




AIR FLOW RIDGE VENTILATOR

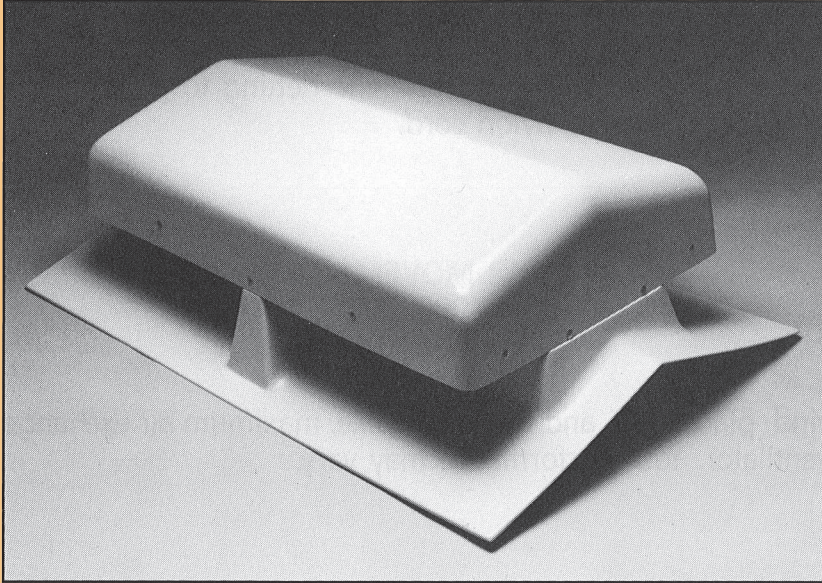


- *Gravity Operated*
- *Low Profile*
- *Corrosion Resistant*
- *Ease Of Operation*
- *Easily Installed*
- *Molded Fiberglass Construction*
- *Effective Low Cost Ventilation*

Molded fiberglass construction provides a corrosion resistant durable ventilator. Vent is installed in conjunction with normal ridge material. Sold mesh screen prevents bird infiltration through ventilator. Simple gravity operation provides for effective, low cost air flow.

PLYCO

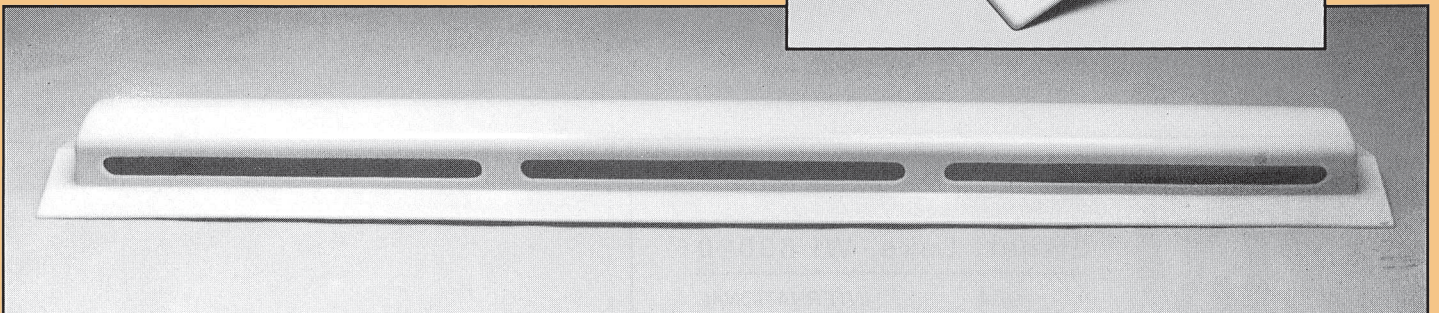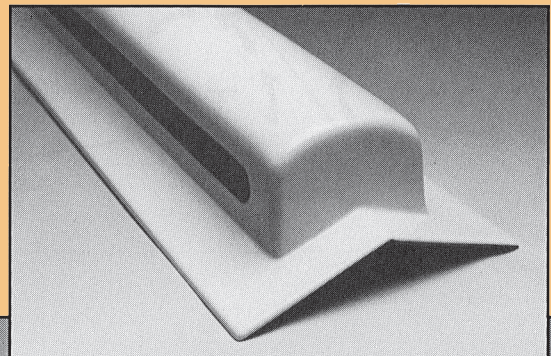

AIR FLOW RIDGE VENTILATOR

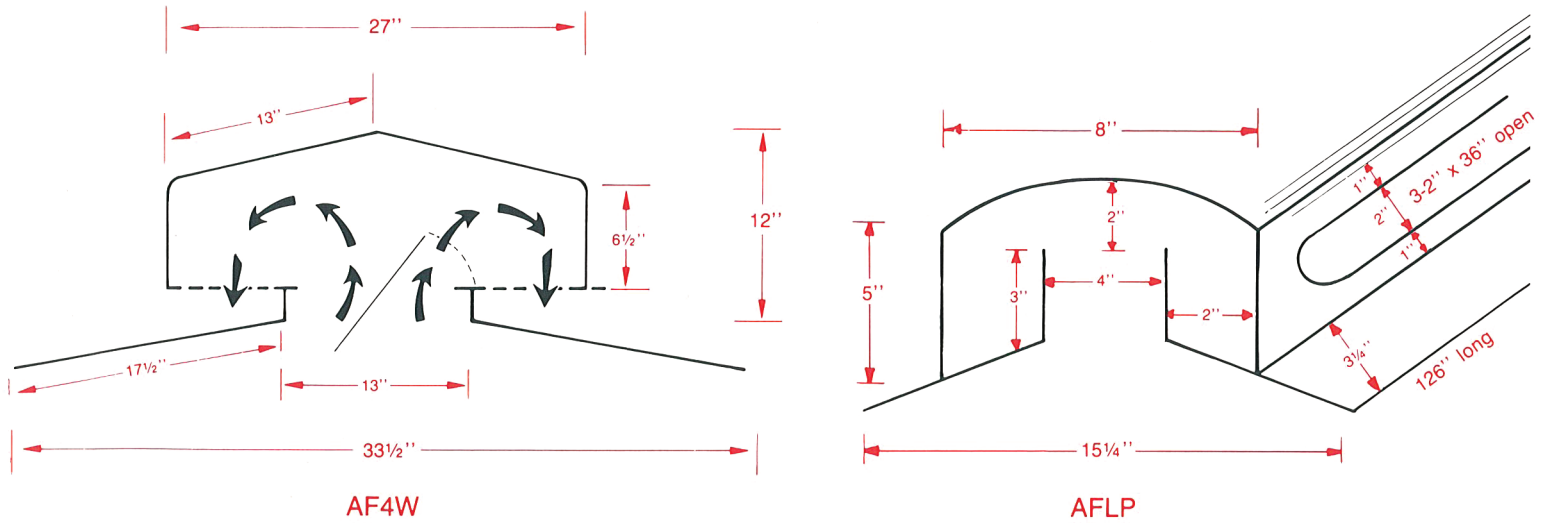

SPECIFICATIONS

PHYSICAL CHARACTERISTICS

The air flow ventilator is made of durable molded fiberglass, with polyethylene netting to prevent bird infiltration. Ventilators with baffles are controlled by a durable nylon cord.

AIR MOVEMENT

VENTILATOR	AIR MOVEMENT
54" Air Flow Ridge Ventilator	4000 CFM
10'6" Low Profile Ridge Ventilator	2584 CFM

Due to variance in buildings, temperature, wind, placement, and fresh air intake, maximum air exchange cannot be accurately measured on a ridge ventilator. Your performance may vary.

INSTALLATION RECOMMENDATIONS

It is recommended that screws be used in the installation of the air flow vent. A closure strip should be used between the roofing and ventilator to produce a more secure fit.

- Due to Plyco Corporations on going commitment to product improvement, we reserve the right to change, without notice, product specifications, availability, prices and conditions of sale.
- Products are shown with options, please contact your representative.

PLYCO
CORPORATION

Elkhart Lake, WI 53020

<i>USA</i>	<i>INTERNATIONAL</i>
800-558-5895	(920) 876-3611
Fax 800-257-5926	Fax (920) 876-3527

Distributed by: