

PLYCO

CORPORATION
PO BOX 386 • ELKHART LAKE, WI 53020

SLIDING DOOR TRACK

ACCESSORIES

COMBO[®]

PLY-TRAC

**SLIDING DOOR TRACK
ACCESSORIES**

*Latches and Pulls
Guides and Stops
Cover and Trim
Accessories for
PLY-TRAC and COMBO*

Latches and Pulls



191000
191500

No. 191000 — "Ragland" center latch.


Strongest center latch available for double-leaf doors with metal verticals. Ends wind damage... *doors can't buckle in the middle*. Keeps prowlers out... *doors can only be opened from inside*. Cuts costs... *brackets serve double-duty as door pulls*. Brackets mount on horizontal door rails. No filler boards. Made of heavy-duty, zinc-plated, $\frac{7}{16}$ " diameter steel rod. Has 13" latching rod.



191550

No. 191500 — "Ragland" center latch.

Same as No. 191000, except has 17" latching rod for double-leaf doors with 2" x 6" wood verticals.

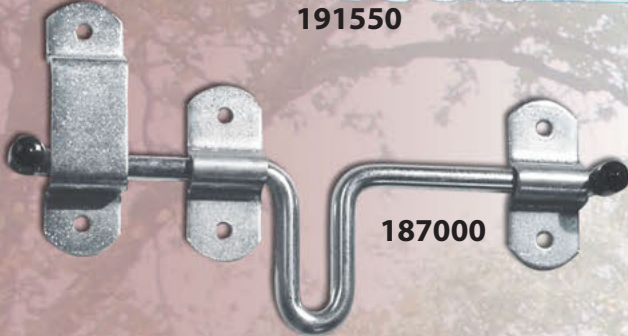

187000

No. 191550 — "Ragland" center latch.

Same as No. 191000, except with heavy-duty latching chain.

No. 187000 — Sliding-bolt latch.

Serves as door latch and pull. Can be padlocked. Protective plastic caps on each end. Right- or left-hand installation.



188000
188300

No. 188000 — Cam-action jamb latch.

7-inch hook and powerful cam-action pulls the door securely against the jamb. Eliminates rattling and wind damage. Opens inside only. Made of heavy galvanized steel.



188000P
188300P

No. 188300 — Cam-action jamb latch.

Same as No. 188000, except with a 9-inch hook.

No. 188000P — Cam-action jamb latch.

Same as No. 188000, except with red, plastic-coated handle.

No. 188300P — Cam-action jamb latch.


Same as No. 188300, except with red, plastic-coated handle.



190000

No. 190000 — Door "Keeper-Stopper".

For use with metal vertical door members. Stops doors in full-open and full-closed positions and holds them tight against the jambs. Equalizes stress on vertical door members from internal wind loads and prevents doors from lifting during wind storms. Install on one side for single-leaf doors; on both sides for split-leaf doors. Made of 10-gauge, galvanized steel; $\frac{1}{4}$ " hook.

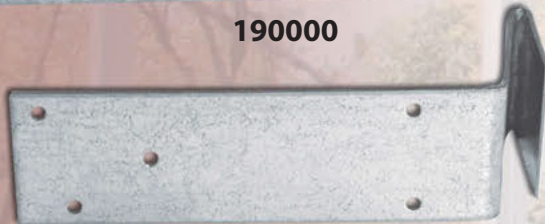

190500

No. 190500 — Door "Keeper-Stopper".

Same as No. 188300, except with $2\frac{3}{8}$ " hook.



183000
183500

No. 183000 — Galvanized-steel door pull.

$6\frac{5}{8}$ " x $1\frac{1}{4}$ " size means plenty of room for the largest hand, even when gloved.

No. 183500 — White-painted door pull.

Same as No. 183000, except with white-painted finish.

No. 185500 — Non-adjustable door stop.


For doors up to $\frac{1}{4}$ " thick. Made of heavy, 10-gauge galvanized steel.

185500

Guides and Stops

No. 185000 — "Guide-Master" adjustable door stop.

Large, converging surfaces guide the door leaf gently into the stop and hold it securely to avoid wind damage. Mounts wherever needed (even at corners) to stop doors in the open or closed positions. Formed, stationary leg straddles siding ribs... no need to cut siding. Adjusts for 1½" to 3½" doors. Heavy-gauge, zinc-plated steel.

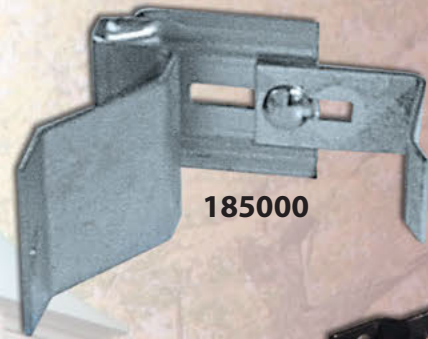

185000

No. 181500 — Adjustable door guide and stop.

White-painted, heavy-gauge steel bracket for guiding and stopping sliding doors from 2½" to 6" thick. Curved surfaces provide rigid assembly and guide the door into the bracket.



181000
181500

No. 181000 — Adjustable door guide and stop.

Same as No. 181500, except galvanized.

No. 184000B — Super Do-All.

Many uses all around the barn. Serves as a door pull, door guide, door stop, center lock... even as a bridle hook and a boot pull. Made of 7/16" diameter steel rod welded to a 10-gauge steel mounting plate with a durable black-painted finish.



184000B
184000W

No. 184000W — Super Do-All.

Same as No. 181500, except with a white-painted finish.



No. 189000 — Adjustable, offset stay roller.

Galvanized-steel bracket fits against the mounting surface to provide a complete seal. Tough, long-lasting Delrin guide wheel won't scratch or mark the door. Three wheel-mounting slots provide adjustment for full guide-wheel contact, whether doors have a full or small overlap at jamb. Adjusts for doors up to 3⅝" thick on center slot; up to 2½" thick on outside slots. Bracket can be inverted for anchoring into concrete.



189500




156000

No. 189500 — Adjustable stay roller.


Same as No. 189000, except with a single wheel-mounting slot to adjust for doors up to 2¾" thick.

Continuous, Bottom Door Guide System

For durable, wind-proof door installations. Doors always roll easy... no binding or catching on the smooth, mated surfaces. Easy to install. First, mount three **No. 155000 adjustable, guide-rail brackets** onto the building splash boards for each 10' length of guide-rail. Then, attach **No. 154000 Z-shaped guide-rail brackets**. And finally, mount the bottom channels onto the full width of the bottom, horizontal door members. For 1½" doors, use **No. 151508 8' bottom channel**, **No. 151500 10' bottom channel** or **No. 151512 12' bottom channel**. For 3½" doors, use **No. 153508 8' bottom channel**, **No. 153500 10' bottom channel** or **No. 151312 12' bottom channel**. To hold split-leaf doors in the closed position, mount one **No. 156000 center door guide** on a 6" x 6" post buried in the center of the door opening. All components are made of heavy, galvanized steel.

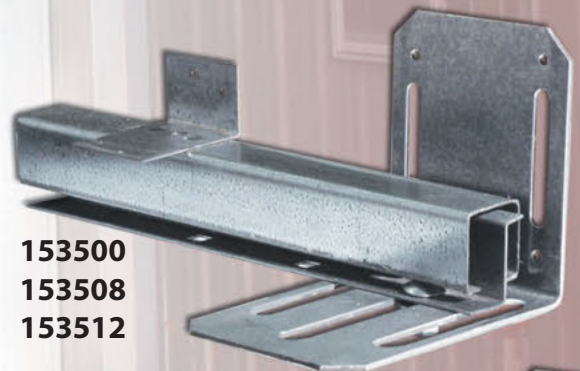

153500
153508
153512

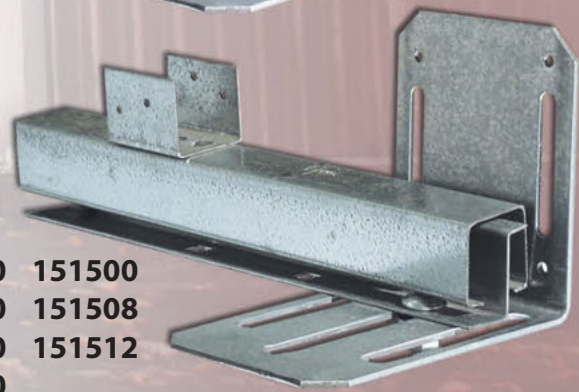

154000 151500
154500 151508
155000 151512
155500

PLYCO CORPORATION
USA
800/558-5895
FAX: 800/257-5926

INTERNATIONAL
920/876-3611
FAX: 920/876-3527
www.plyco.com

Cover and Trim

122000
123000
125000
126000

PLYCO track cover and trim is made of strong, 28-gauge steel with an attractive and durable, white-painted finish. All track covers and "Snap-Up" cover cap come in 10' - 1" lengths. End trim mounts onto track or track plank.

No. 125000 — Standard, side-mount track cover.

For 2" track plank. Bottom lip hooks over the bottom edge of the cover brackets. Top lip is nailed to the header.

No. 124000 — Standard, double-track, side-mount track cover.

Same as No. 125000, except for double-track runs.

No. 123000 — Standard, side-mount track cover for 6" doors.

Same as No. 125000, except for doors up to 6" thick.

No. 126000 — Standard, top-mount track cover.

Same as No. 125000, except for top-mount track.

No. 122000 — Standard, top-mount track cover for 6" doors.

Same as No. 126000, except for doors up to 6" thick.

No. 127000 — "Snap-Up" track cover.

Top lip on exclusive COMBO "Snap-Up" track cover slips into the offset recesses on the top of the side-mount track mounting brackets, while the bottom lip snaps over the bottom edges of the "Snap-Up" cover brackets. No fasteners needed.

No. 127500 — "Snap-Up" track cover cap.

For covering the top of the 2" track plank and the top edge of the "Snap-Up" cover. Also protects the top of the door leaf.

No. 135000 — Side-mount track cover end trim.

No. 136000 — Top-mount track cover end trim.

No. 137000 — "Snap-Up" track cover end trim.

No. 134000 — Double-track cover end trim.

No. 133000 — Side-mount track cover end trim for 6" doors.

No. 132000 — Top-mount track cover end trim for 6" doors.

124000

127000

127500

132000
133000
134000
135000
136000
137000

Because of its ongoing commitment to product improvement, Plyco Corporation reserves the right to change, without notice, product specifications, availability, prices and conditions of sale.

PLYCO
CORPORATION
PO BOX 386 • ELKHART LAKE, WI 53020

www.plyco.com 800/558-5895 FAX: 800/257-5926
INTERNATIONAL 920/876-3611 FAX: 920/876-3527

**WINDOWS • WALK DOORS • WALL VENTS • RIDGE VENTS
SLIDING DOOR TRACK • SLIDE DOOR RAILS • PLY-FOIL INSULATION
HORSE STALLS • FASTENERS & CLOSURES • SPECIALTY PRODUCTS**

403-12-1