



***DESIGNED SPECIFICALLY FOR THE METAL CLAD BUILDING INDUSTRY***

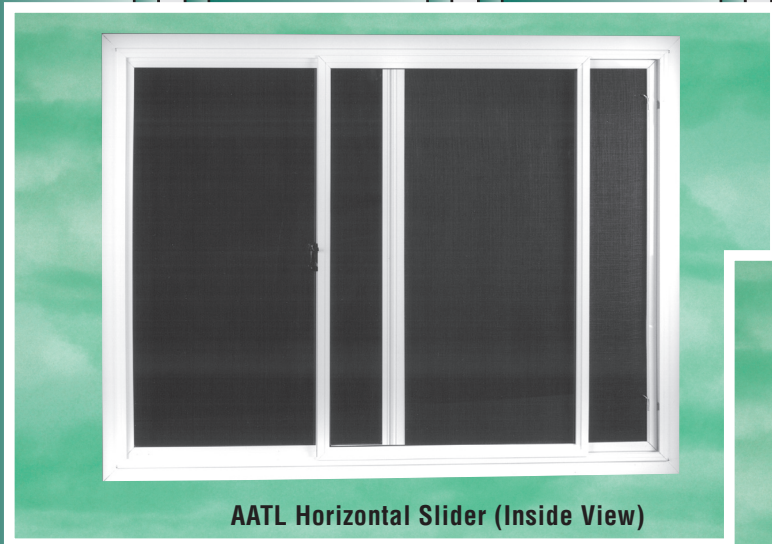

**AATL Horizontal Slider (Inside View)**

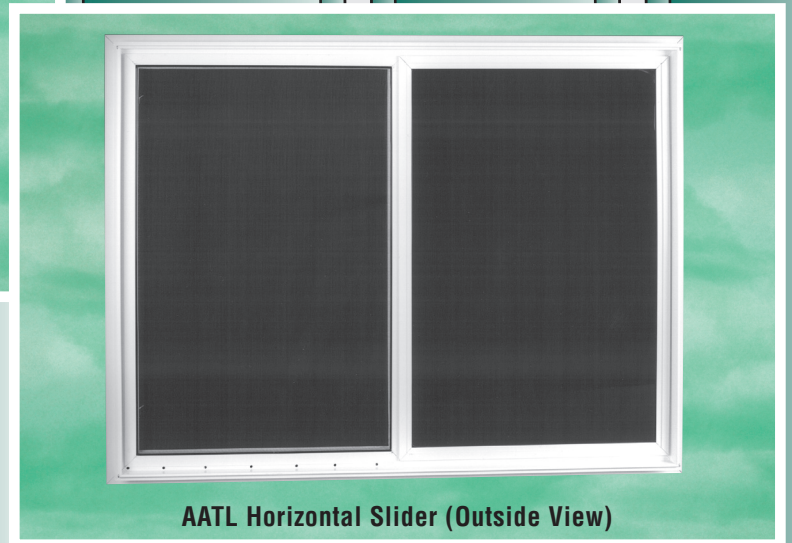

**AATL Horizontal Slider (Outside View)**

**AATL**

***All Aluminum Window***

**PLYCO**  
CORPORATION

Elkhart Lake, WI 53020

USA  
800-558-5895  
Fax 800-257-5926

INTERNATIONAL  
414-876-3611  
Fax 414-876-3527

**Builders in need of a window that is easy to install and looks great after installation will like the AATL line from Plyco!**

This window is cartoned for easy handling in warehouse, for shipping, and by the crew. The window can be made in standard sizes to meet your demands in crystal clear glass glazing or impact resistant acrylic glazing. The AATL series is adaptable to many utility installations such as equipment sheds, residential garages, and industrial buildings. Not recommended for commercial, residential, or institutional use.

## FEATURES AND BENEFITS

- Available in Self-Flashing or Ready to Accept "J" Trim**  
Self Flashing Benefits:
  - Outside fin designed to cover up to 1-1/8" profiles
  - Eliminates additional exterior trims
  - Improves finished appearance hiding the cut edge of the exterior sheeting
- Built-in Nailing Flange Speeds Installation**
- Strong All Aluminum Frame and Sash**
- Deluxe Lock and Reinforced Meeting Rail**
  - Spring loaded flip latch for added security
  - Standard on all slider units
- Packaged 2 per Carton to Reduce Damage**



### Standard Sizes - In White, Bronze or Chocolate:

|                             |                             |
|-----------------------------|-----------------------------|
| 3618 R.O. 36-3/4" x 18-3/4" | 4425 R.O. 43-1/2" x 25-1/2" |
| 3625 R.O. 36-3/4" x 25-1/2" | 4432 R.O. 43-1/2" x 32-3/8" |
| 3636 R.O. 36-3/4" x 36-3/4" | 4836 R.O. 47-7/8" x 35-7/8" |

### WINDOW GLAZING OPTIONS:

**Acrylic:** Extruded from acrylic molding pellets, the manufacturer certifies and guarantees that Plaskolite will show no appreciable effect of weather and no significant loss of physical performance for a period of 20 years of outdoor exposure. Acrylic has 25% the heat loss of glass and is very hard to break.

**Glass:** Single strength AWG Standard glass for crystal clear visibility.

**Screen:** Standard on exterior units.

## Other Window Applications

The exterior AATL Trimline window can be supplemented with a second similar interior window to provide an energy-saving double window installation.

With the ever-increasing cost of energy, many utility buildings are constructed with fully insulated walls. The Trimline Insulated Series, with inside and outside units, complements these buildings by assuring a weathertight window with air space sufficient to reduce cold penetration. The inside unit is supplied without screen or lock. Sizes and rough openings are identical to the Trimline Series. Packaged 1 set per carton.

### Flange Out: Self-Flashing Exterior Frame and Flush-Mount Interior Frame

#### Exterior with Flange

White  
Chocolate  
Bronze



#### Interior without Flange

White Only

for installations that do not have corrugated metal inside liners

### Flange In and Out: Self-Flashing Exterior and Interior Frames

#### Exterior with Flange

White  
Chocolate  
Bronze



#### Interior with Flange

White  
Chocolate  
Bronze

for corrugated metal on each side

### No Flange: Flush Mount Exterior and Interior Frames

#### Exterior without Flange

White Only



#### Interior without Flange

White Only

for smooth finish walls inside and out