NEW!

PLY-LO DRILLER

-- PATENTED --




PLY-LO DRILLER features an innovative new design drill point. This patent pending design will speed penetration and reduce metal shavings and dust. The **PLY-LO DRILLER** matches the specifications of the PLY-LO family of fasteners with the addition of the **PLY-LO DRILL POINT** making it a fast drilling fastener with superior pull out performance for all metal to wood construction.

- Innovative Patent Pending drill point design
- Fast piercing drill point reduces dust and debris
- Less prone to “walk” when drilled at a slight angle
- All fasteners are thoroughly tested internally and by a 3RD PARTY
- 250 count job pack bags
- EPDM bonded washer for superior seal
- PLY-LO long life paint system featuring East Coast color matching to assure your fasteners will be a perfect color match to any roll former’s steel



Proper head size ensures drive stability, eliminating fastener wobble and head stripping giving your project a clean finished appearance

1/2” EPDM washer for a superior seal

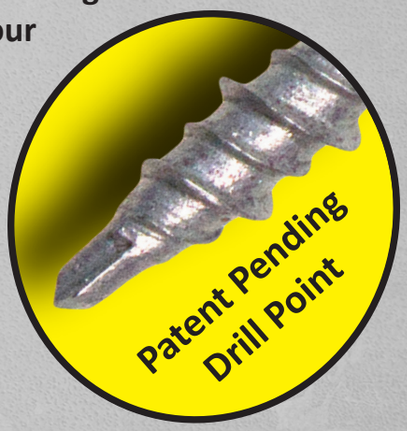

Patent Pending PLY-LO Drill Point for faster drilling every time, reducing installation time on the jobsite

The Original PLY-LO Hi-Low threads for easier drilling and unrivaled holding power

12 YEAR LIMITED WARRANTY

The **FASTEST, SHARPEST, CLEANEST DRILLING FASTENERS** available

BUILDING CONNECTIONS

- Metal to Wood
- Original PLY-LO Hi-Low Thread
- All Fasteners Are Thoroughly Tested

PLY-LO AVERAGE PULLOUT 1" PENETRATION

TEST MATERIAL	SPECIFIC GRAVITY	ULTIMATE PULLOUT/LBS
SPF	.42	596
DOUGLAS FIR	.50	1028
SOUTHERN PINE	.55	1047
15/32" PLYWOOD	.45	362
19/32" PLYWOOD	.45	410

PLY-LO FASTENER STRENGTH CHARACTERISTICS

SIZE	STEEL	TENSILE	SHEAR	TORSIONAL	RC HARDNESS
10	C1018	2100 LBS	1400 LBS	65 IN-LBS	48-54 28-38

HEAD	POINTS	WASHER	HEIGHT	MAJOR DIA	MINOR DIA.
.250 max.	.277 min.	0.345	0.143	.194 - .201	.135 - .150

Lumber for these tests is typical of the wood used in post frame construction. This lumber was not kiln dried. Tighter grain structure would provide substantial increase in pullout values. Values with 1" penetration can vary up to 1150 lbs, depending on wood density. We believe these are typical values found in field applications. These values are ultimate with no safety factors. Recommended minimum penetration is 1".

24 HOUR SERVICE

Committed to helping you meet your project deadlines.

Contact your EAST COAST FASTENERS & CLOSURES territory manager about our QUICK SHIP PROGRAM!

East Coast
FASTENERS & CLOSURES, INC.

800-558-5895 ◆ FAX:800-257-5926

Ply-Fast ◆ Ply-Lo ◆ Stainless Steel ◆ Metalfast ◆ Alumi-Drill
Ply-lo Low Profile ◆ Roof Clip Fasteners ◆ Flashers
Steel Frame Fasteners ◆ Wood Deck Fasteners ◆ Closure

Because of its ongoing commitment to product improvement, East Coast / Plyco Corporation reserves the right to change, without notice, product specifications, availability, prices and conditions of sale.

922-19-2