


ALUMINUM GUTTER HANGER WITH SCREW

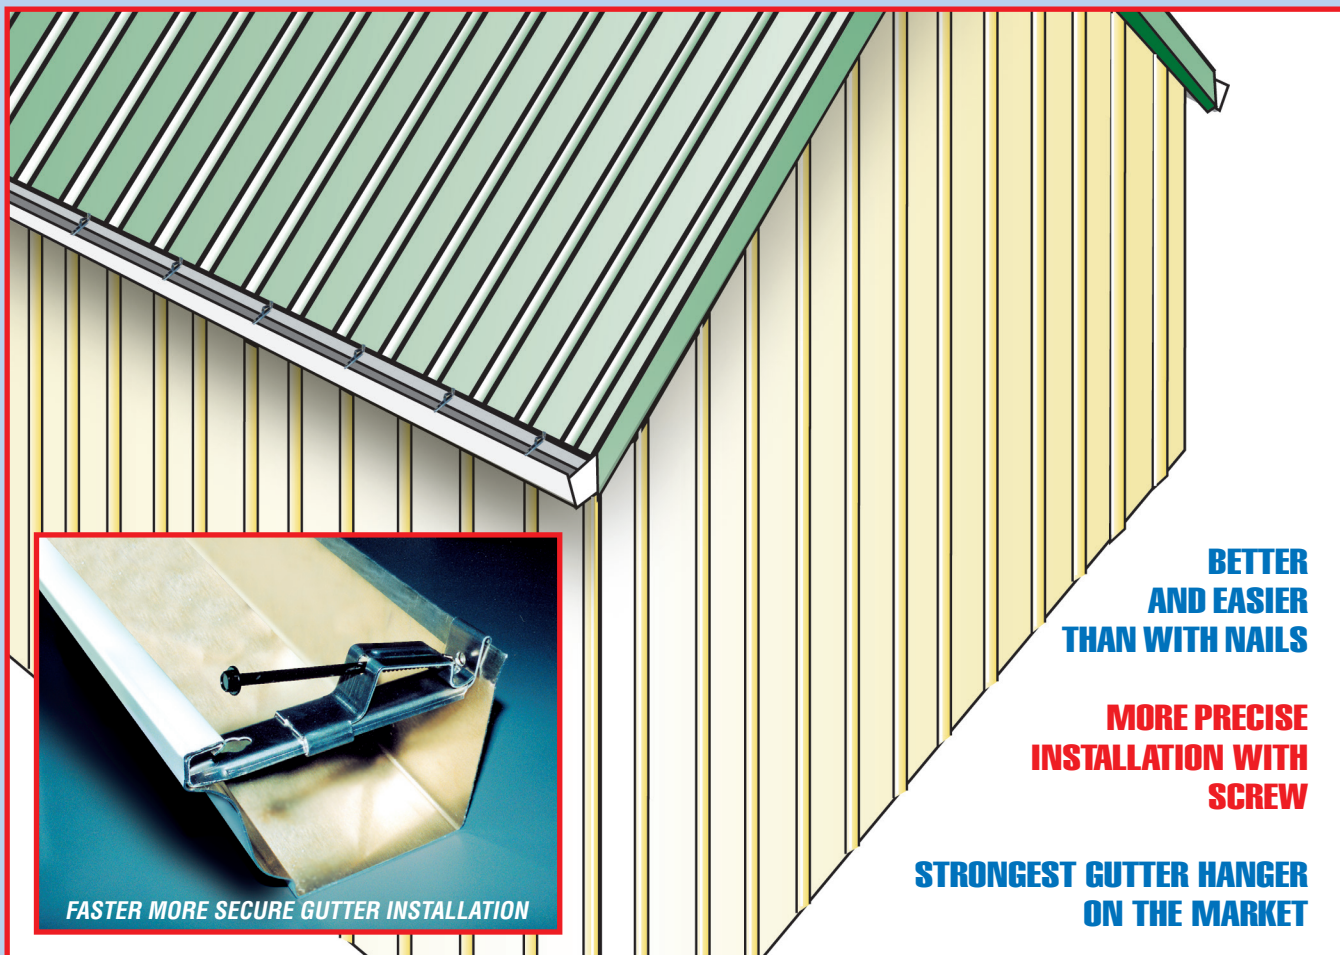

**#12-11 X 3-3/4" SCREW
1/4" A.C. FLATS HWH**

INSTALLATION INSTRUCTIONS:

1. Place one gutter hanger every two feet.
2. Insert Nose of Gutter Hanger and rotate rear down over straight back gutter.
3. Hold gutter clip fully down on gutter and drive screw.



Part#	GUTTERHG-5-500	500 Piece Box
Part#	GUTTERHG-5-100	100 Piece Box

SERIES GUTTERHG

Due to Plyco Corporation's ongoing commitment to product improvement, we reserve the right to change, without notice, product specifications, availability.

PLYCO
CORPORATION
PO BOX 386 • ELKHART LAKE, WI 53020

www.plyco.com 800/558-5895 FAX: 800/257-5926
INTERNATIONAL 920/876-3611 FAX: 920/876-3527

**WINDOWS • WALK DOORS • WALL VENTS • RIDGE VENTS
SLIDING DOOR TRACK • SLIDE DOOR RAILS • PLY-FOIL INSULATION
HORSE STALLS • FASTENERS & CLOSURES • SPECIALTY PRODUCTS**

914-16-1